

Hanging Instructions

Textile Wall Art Frames

The frame with your fabric will be lightweight and can be hung using pins, tacks, or masonry nails. Hammer them into your wall, then hook on the frame as illustrated below.

They can also be put up with Velcro or Self-Adhesive Picture Hanging Strips



Wall Type and Fixings

Consider what type of wall you are working with – for example, a solid or plasterboard wall .

Tapping on the wall should tell you how it's constructed.

A hollow sound suggests the wall is plasterboard. A solid sound suggests solid (brick or breeze-block).

Hollow and Plasterboard walls


1, Measure the distance between the eyelets on the back of the frame for your wall markings.



2, Transfer the measurement to your wall area and mark. Use a spirit level to make sure the markings are level.



3, Hammer in the pins/tacks/nails on your marks and then hook onto the eyelets of the frame.

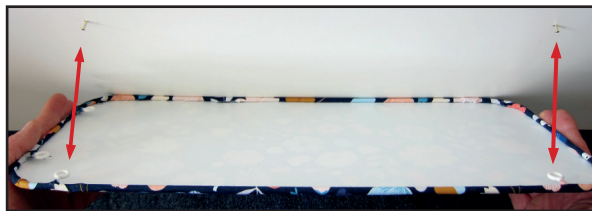

Masonry walls

As above but you will need to use masonry nails, but some walls will accept picture hook nails/pins. Wear safety glasses or goggles when hammering as debris could fly out into your eyes.

Things to think about – Safety!

Do not hammer nails or drill directly above or below light switches or plug sockets as cables conventionally run vertically up from light switches and down from sockets.

A cable, pipe and stud detector is an essential tool to help locate timber studs and identify the locations of electricity cables and water pipes below the wall surface.

